

Technical Data Sheet

SMF-00100 Rev A




HP2X8B POWER CABLE

120-00033-00

Rev A

PAGE 1 of 1

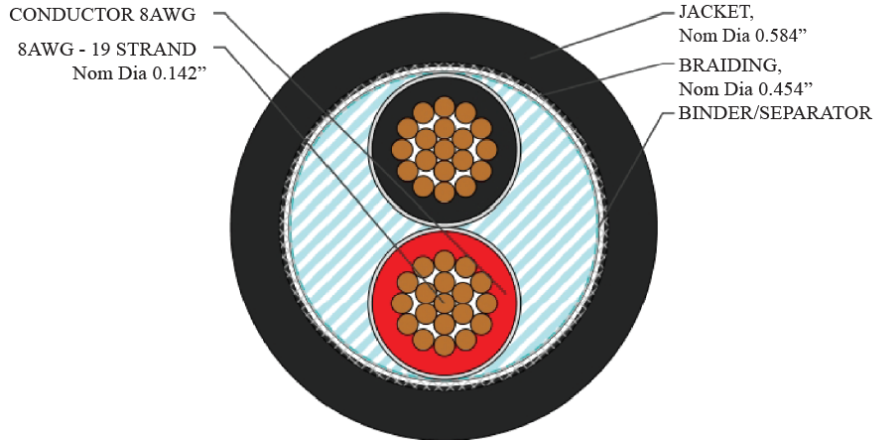

Description

UV protected and outdoor rated two 8 AWG conductor power cable for RRU applications. Braided shielding prevents radio interference and enhances electrical protection.

Available Variations

HP2X8B Available by the foot, or 150' coil

Additional Parts

- N/A

Electrical Data

Conductor Size	8 AWG
Conductor Quantity	2 (1 Pair)
Operational DC Voltage	48V
DC Resistance	0.654 Ohm/1000 ft max @ 20°C
Color Code	Black, Red

Mechanical Data

Minimum Bend Radius	6 inches
Diameter Over Jacket	0.584 in (14.83 mm) (Nominal)
Approx. Weight	0.227 lb/ft
Recommended Hanger Spacing	1.0 m

Environmental Data

Temperature Range	
Installation	-4°F to 140°F
Operation	-22°F to 158°F
Storage	-22°F to 158°F

Packaging

Lengths up to 150' are coiled and boxed
Lengths from 151' - 500' are supplied on 24"x10" wood reel
Lengths over 500' are supplied on 32"x18" wood reel



EUPEN

CABLE USA

5181 110th Ave N, Unit D Clearwater, FL 33760 | 800-419-5100 | www.eupen.us