

Technical Data Sheet




FJM450-00021-XXXY

Document No.

120-00164-00

Rev A

PAGE 1 of 1

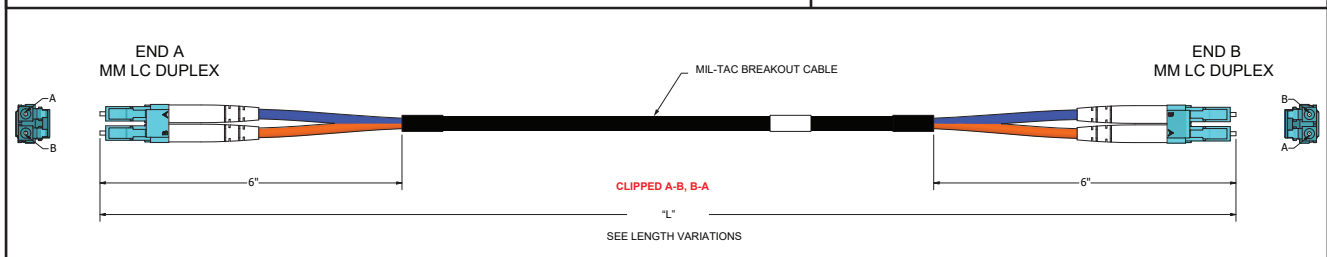

Description

Fiber Jumper assembly with 2 multi mode fibers, black MIL-TAC breakout cable, XXX foot lengths, both ends terminated with duplexed LC connectors, clipped A/B, B/A polarity.

Available Standard Variations

Part Number	Length	Weight lbs
FJM450-00021-010F	10 Feet	0.24
FJM450-00021-005M	5 Meter	0.40
FJM450-00021-020F	20 Feet	0.48
FJM450-00021-040F	40 Feet	0.96

Optical Data

Fiber Quantity	2
Fiber Type	Multi Mode Fiber
Connector Type	Duplex LC (UPC polish)
Polarity	A/B and B/A
Insertion loss	< 0.25 dB Plus Cable Attenuation (3dB/km) (Tested per Telcordia GR-326)
Return loss	< -35 dB @ 850 and 1300 nm (Tested per Telcordia GR-326)

Mechanical Data

Minimum Bend Radius	
Installation	2.6 inches
Operation	1.3 inches
Diameter Over Jacket	0.26in [6.5mm]
Weight	0.024 lb/ft
Maximum Hanger Spacing	1.0m
Crush Resistance	8.85 lb/in
Tensile Strength	490 lbs (Installation), 120 lbs (Operating)

Environmental Data

Temperature Range	
Operation	-67°F to 185°F
Storage	-94°F to 185°F